



Performance Curves

Alfa Laval LKH Prime/LKH Prime UltraPure 10


Motor: 60 Hz
3500 rpm. synchron.
Tolerance: ±8% for Q
Tolerance: ±6% for H
Impeller, Max. dia.: 5.906" (150 mm)
Impeller, Min. dia.: 3.543" (90 mm)
Pump inlet, Dia.: 2" (51 mm, DN 50)
Pump outlet, Dia.: 2" (51 mm, DN 50)

Performance data refer to water at 68 °F. (20 °C)

NOTE! The curves refer to motor: 10 Hp (7.5 kW), 3490 rpm. asynchr., 60 Hz. For smaller motors, reduce head (H) with: 3%.

DO NOT FORGET THE SAFETY FACTOR.

DO NOT FORGET THE SAFETY FACTOR

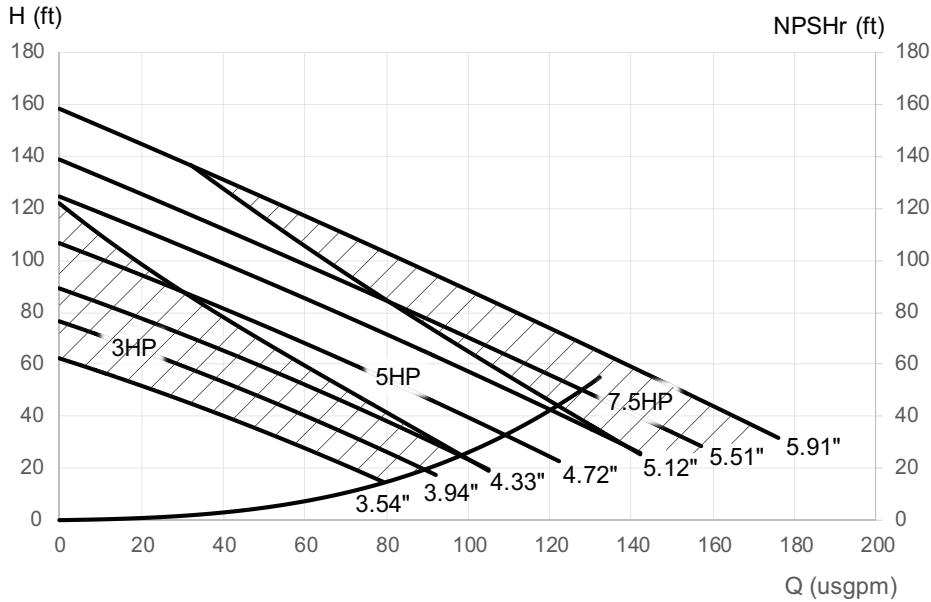

30130264

Alfa Laval reserves the right to change specifications without prior notification.

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.us to access the information direct.

