


Sanitary Drum Transfer Pumps

SP-8800 / SP-8900 SERIES

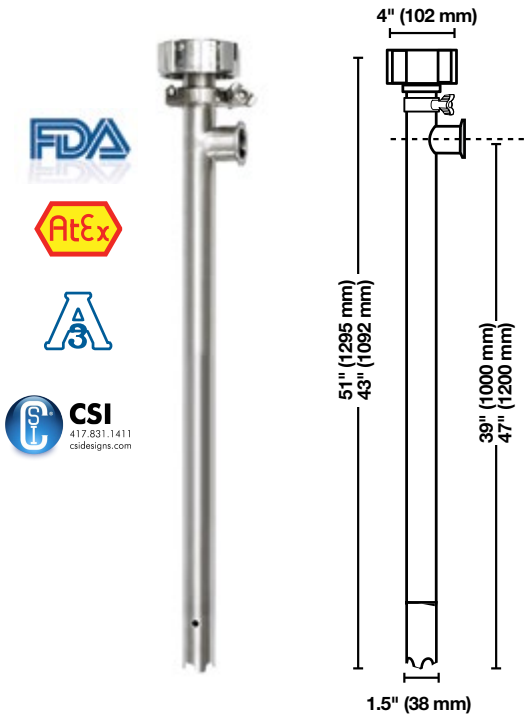

8800 Series

MODEL	TUBE ASSEMBLY	BUSHING	IMMERSION LENGTH	IMPELLER	SHIPPING WT lbs (kg)
SP-8800-39	SS316	PTFE	39" (1000 mm)	High Volume	12.0 (5,5)
SP-8800-47	SS316	PTFE	47" (1200 mm)	High Volume	14.0 (6,4)

8900 Series

MODEL	TUBE ASSEMBLY	BUSHING	IMMERSION LENGTH	IMPELLER	SHIPPING WT lbs (kg)
SP-8900-39	SS316	PTFE	39" (1000 mm)	High Pressure	12.0 (5,5)
SP-8900-47	SS316	PTFE	47" (1200 mm)	High Pressure	14.0 (6,4)


Technical Specifications

Immersion Length:.....39" (1000 mm)
 47" (1200 mm)
Wetted Components: SS316L, PTFE & Buna
Motor Drive: SP-ENC, SP-A1, SP-A2, SP-400 Series
Discharge Size:..... 1.5" Tri-Clamp /
 Optional 1" Tri-Clamp Hose Barb
Maximum Viscosity: 1,000 cps (mPAS)*


Maximum Discharge Pressure: 40 psi (2,8 bar)
Maximum Flow Rate: 35 GPM (132 LPM)
Pump Weight: 11 lbs (5 kg) does not include motor weight
 which varies upon model.
Maximum Temperature: 175° F (80° C)
Pump Finish: 32 Ra
ATEX Certification:..... ATEX 2014/34/EU
 EX II 2G c IIB T4

Flow Curves:

High Volume Pumps:

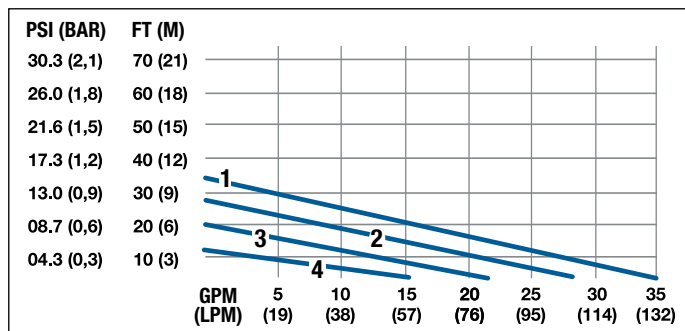

High Pressure Pumps:

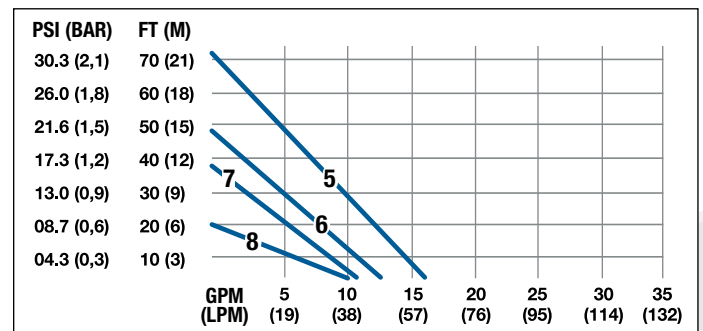

- 1 SP-ENC / High Volume Tube
- 2 SP-420EX, SP-A2 / High Volume Tube
- 3 SP-A1 / High Volume Tube
- 4 SP-410EX / High Volume Tube

- 5 SP-ENC / High Pressure Tube
- 6 SP-420EX, SP-A2 / High Pressure Tube
- 7 SP-A1 / High Pressure Tube
- 8 SP-410EX / High Pressure Tube

Note: Pump is constructed with FDA compliant materials; however, the pump does not have FDA certification.

*Pump is intended for intermittent use when operating at maximum viscosity.